


標準ローラチェーン (HKK 80~HKK 180)

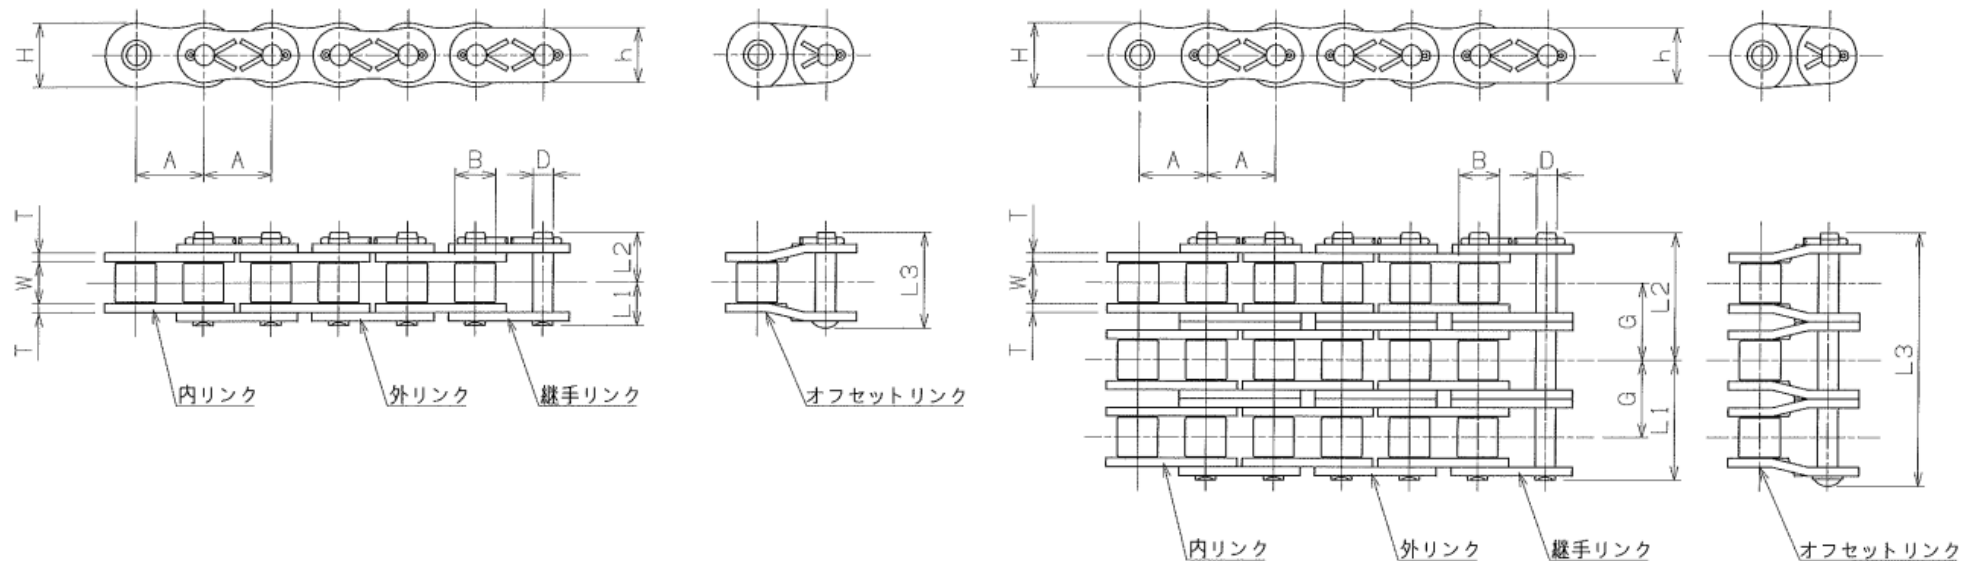

※HKK80.100.120チェーンはリベットタイプも在庫しています。

●チェーン寸法

●引張強さ・許容張力

HKK Chain No.	列数	JIS Chain No.	チェーンピッチ	ローラ外径(最大)	内リンク内幅(最小)	プレート			ピン				横ピッチ	概略質量	JIS規格引張強さ	HKKChain		
						高さ(最大)	高さ(最大)	厚さ	外径(最大)	ピン長	寸法					リベットピン長	平均引張強さ	最大許容張力
											L1+L2	L1						
HKK 80	1	80	25.4	15.88	15.88	23.40	20.20	3.20	7.93	35.5	16.4	19.1	37.3	-----	2.52	55.6	78.50	19.10
HKK 80-2	2	80-2								64.5	30.8	33.7	66.6	29.3	5.10	111.2	157.00	25.00
HKK 80-3	3	80-3								94.1	45.5	48.6	95.3	29.3	7.68	166.8	236.00	36.80
HKK 80-4	4	80-4								123.5	60.2	63.3	124.5	29.3	10.25	222.4	314.00	48.50
HKK 80-5	5	80-5								152.8	74.9	77.9	154.0	29.3	12.84	278.0	393.00	57.30
HKK 80-6	6	80-6								182.1	89.6	92.5	183.3	29.3	15.42	335.4	471.00	67.60

HKK 100	1	100	31.75	19.05	19.05	29.30	25.30	4.00	9.53	43.0	19.7	23.3	45.0	-----	3.91	86.7	118.00	29.40
HKK 100-2	2	100-2								78.8	37.6	41.2	80.8	35.8	7.74	173.4	236.00	38.40
HKK 100-3	3	100-3								114.6	55.5	59.1	116.4	35.8	11.58	260.1	354.00	56.50
HKK 100-4	4	100-4								150.8	73.7	77.1	152.1	35.8	15.40	346.8	472.00	74.60
HKK 100-5	5	100-5								186.6	91.5	95.1	187.9	35.8	19.26	433.5	590.00	88.10
HKK 100-6	6	100-6								222.4	109.4	113.0	223.4	35.8	23.10	520.2	708.00	104.00

●チェーン寸法

●引張強さ・許容張力

HKK Chain No.	列数	JIS Chain No.	チェーンピッチ	ロー外径(最大)	内リンク内幅(最小)	プレート			ピン				横ピッチ	概略質量	JIS規格引張強さ	HKKChain			
						高さ(最大)	高さ(最大)	厚さ	外径(最大)	ピン長	寸法					ねじピッチ	平均引張強さ	最大許容張力	
						A	B	W	H	h	T	D				L1+L2			L1
HKK 120	1	120									53.4	24.8	28.6	56.3	-----	5.76	124.6	167.00	39.50
HKK 120-2	2	120-2									98.8	47.5	51.3	102.0	45.4	11.49	249.2	334.00	51.70
HKK 120-3	3	120-3	38.10	22.23	25.40	35.10	30.30	4.80	11.10		144.2	70.2	74.0	147.3	45.4	17.20	373.8	501.00	76.00
HKK 120-4	4	120-4									190.0	93.1	96.9	192.8	45.4	22.92	498.4	668.00	100.00
HKK 120-5	5	120-5									235.4	115.8	119.6	238.0	45.4	28.65	623.0	835.00	119.00
HKK 120-6	6	120-6									280.8	138.5	142.3	283.4	45.4	34.36	747.6	1,002.00	140.00
HKK 140	1	140									58.3	27.0	31.3	61.0	-----	7.41	169.0	216.00	52.30
HKK 140-2	2	140-2									107.2	51.5	55.7	109.5	48.9	14.63	338.0	432.00	68.30
HKK 140-3	3	140-3	44.45	25.40	25.40	40.90	35.30	5.60	12.70		156.3	75.9	80.4	158.4	48.9	21.91	373.8	648.00	101.00
HKK 140-4	4	140-4									205.5	100.6	104.9	207.3	48.9	29.17	498.4	864.00	133.00
HKK 140-5	5	140-5									254.4	125.1	129.3	256.3	48.9	36.45	623.0	1,080.00	157.00
HKK 140-6	6	140-6									303.3	149.5	153.8	305.2	48.9	43.72	747.6	1,296.00	185.00
HKK 160	1	160									68.7	32.2	36.5	71.5	-----	9.79	222.4	275.00	69.00
HKK 160-2	2	160-2									127.2	61.4	65.8	130.4	58.5	19.45	444.8	550.00	90.10
HKK 160-3	3	160-3	50.80	28.58	31.75	46.70	40.30	6.40	14.28		185.7	90.7	95.0	188.6	58.5	29.17	667.2	825.00	133.00
HKK 160-4	4	160-4									244.7	120.2	124.5	247.1	58.5	38.77	889.6	1,100.00	175.00
HKK 160-5	5	160-5									303.3	149.4	153.9	305.7	58.5	48.43	1112.0	1,375.00	207.00
HKK 160-6	6	160-6									361.7	178.7	183.0	364.2	58.5	58.08	1334.4	1,650.00	244.00
HKK 180	1	-----									78.4	36.3	42.1	81.5	-----	13.39	-----	353.00	79.00
HKK 180-2	2	-----									144.0	69.1	74.9	146.9	65.8	26.62	-----	706.00	98.40
HKK 180-3	3	-----	57.15	35.70	35.70	52.50	45.30	7.20	17.45		210.2	102.3	107.9	212.8	65.8	39.85	-----	1,059.00	145.00
HKK 180-4	4	-----									275.9	135.1	140.8	278.3	65.8	53.08	-----	1,412.00	191.00
HKK 180-5	5	-----									341.6	167.9	173.7	343.9	65.8	66.31	-----	1,765.00	226.00
HKK 180-6	6	-----									407.3	200.9	206.4	409.7	65.8	79.54	-----	2,118.00	266.00